

2017

Numerical aspects of incremental dynamic analysis for the retrofitting of existing industrial steel building utilizing SSCD dampers

Bellos, John

<http://hdl.handle.net/11728/12329>

Downloaded from HEPHAESTUS Repository, Neapolis University institutional repository

Numerical aspects of incremental dynamic analysis for the retrofitting of existing industrial steel building utilizing SSCD dampers

John Bellos, Nikolaos Bakas, Carlo Castiglioni

*6th International Conference on Computational Methods in
Structural Dynamics and Earthquake Engineering: COMPDYN-2017*






Abstract

In this work, the nonlinear analysis of an existing industrial steel structure (Sodium building), and its retrofitting using SSCD dampers is demonstrated. Specific numerical complications of incremental dynamic (IDA) and pushover analyses as well as their resolution are presented. In particular, the modelling of a flag shaped, self-centering steel device (SSCD) exhibiting re-centering and recovery, as well as its connection to the structural frames, the results of IDAs in comparison with the results of the Pushover analysis, the ability of IDA to capture nonlinear behavior for high accelerations where pushover stops, the optimal values of dampers stiffness and strength in order to maximize the energy dissipation within the structure, the comparison of the structural performance before and after retrofitting, as well as the association between the re-centering β -factor and capacity curves, are analytically demonstrated. Additionally, the effect of the variation of the dampers positions along building's height as well as the effect of the damper to the capacity curves is discussed.

Case study

- >3000 structural elements
- Steel cross sections
- Incremental Dynamic Analysis
- With(out) SSCD Dampers
- PRO-INDUSTRY
- EU Funding (Coal & Steel)

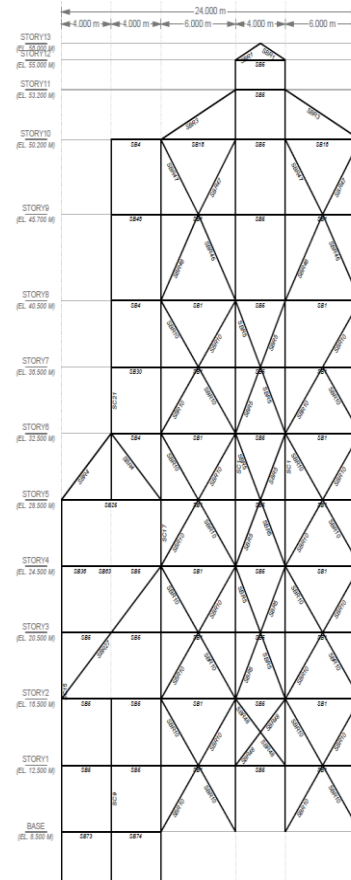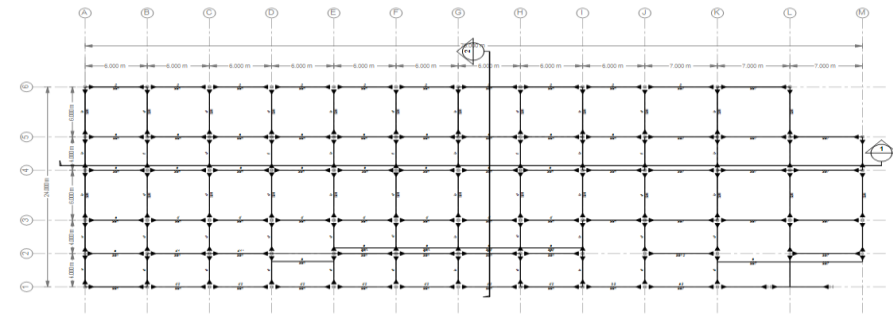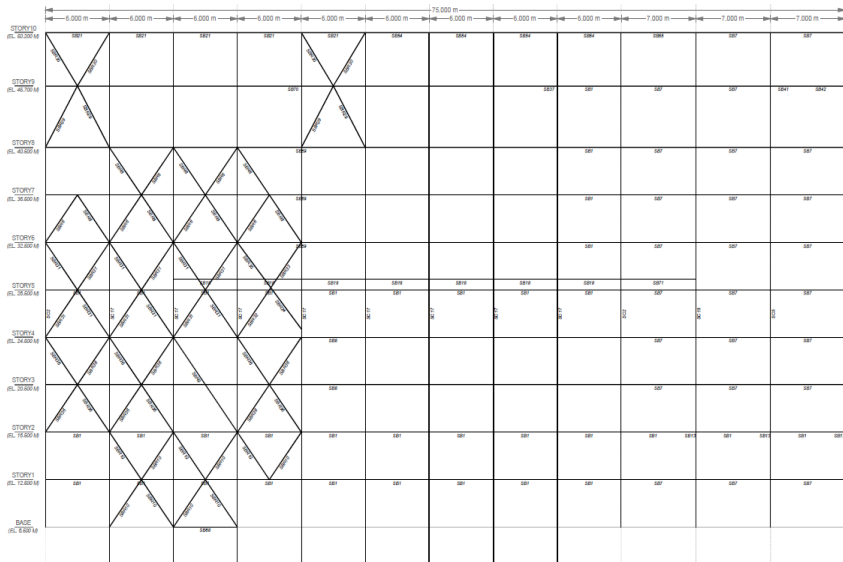


**PROtection of INDUSTRIal plants
by enhanced steel based sYstems**

Initial investigation


- Analysis of 3D model
- Convergence issues
- SAP2000
- Open programming interface
- Optimization of the dampers
- Numerical instabilities
- Convergence issues, local failures

```
int ret;  
string pathToETABS =  
System.IO.Path.Combine(Environment.GetEnvironmentVariable("PROGRAMFILES"), "Computers and  
Structures", "ETABS 2015", "ETABS.exe");  
System.Reflection.Assembly ETABSAssembly =  
System.Reflection.Assembly.LoadFrom(pathToETABS);  
ETABS2015.cOAPI ETABSObject =  
(ETABS2015.cOAPI)ETABSAssembly.CreateInstance("CSI.ETABS.API.ETABSObject");  
ret = ETABSObject.ApplicationStart();  
//ETABSObject.Hide();  
ETABS2015.cSapModel SapModel = ETABSObject.SapModel;  
ret = SapModel.File.OpenFile(dir);  
ret = SapModel.SetModelIsLocked(false);  
ret = SapModel.SetPresentUnits(ETABS2015.eUnits.kN_m_C);
```

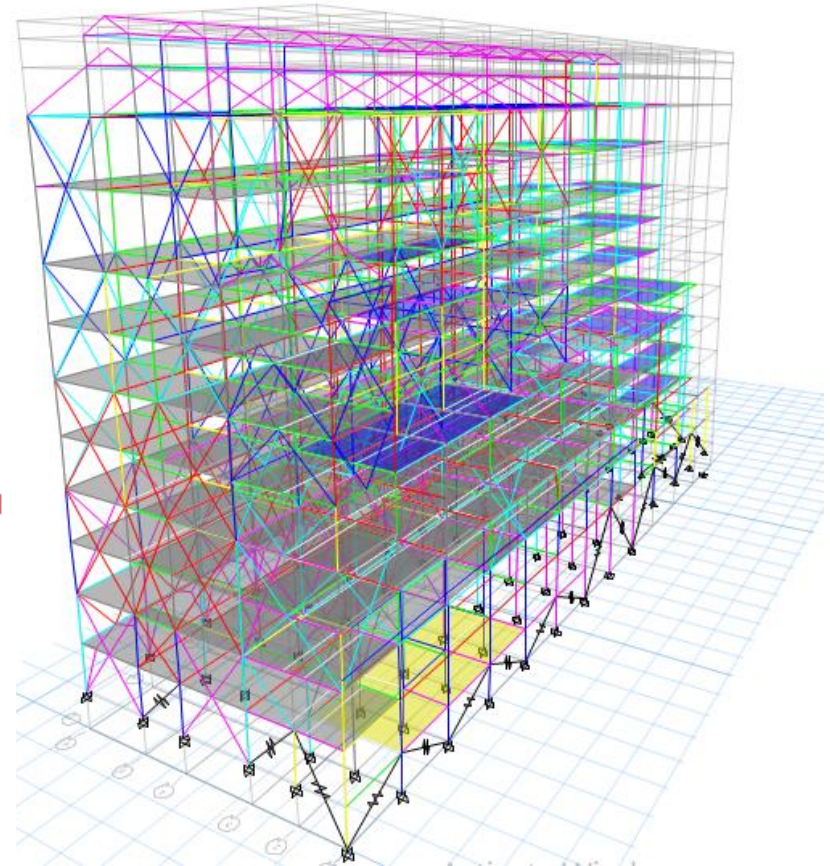


Frame selection


- 13 plane frames exist in yy direction (views A to M)
- The first Eigenmode contains a torsional component, thus frames at the right x-x side should be strengthened

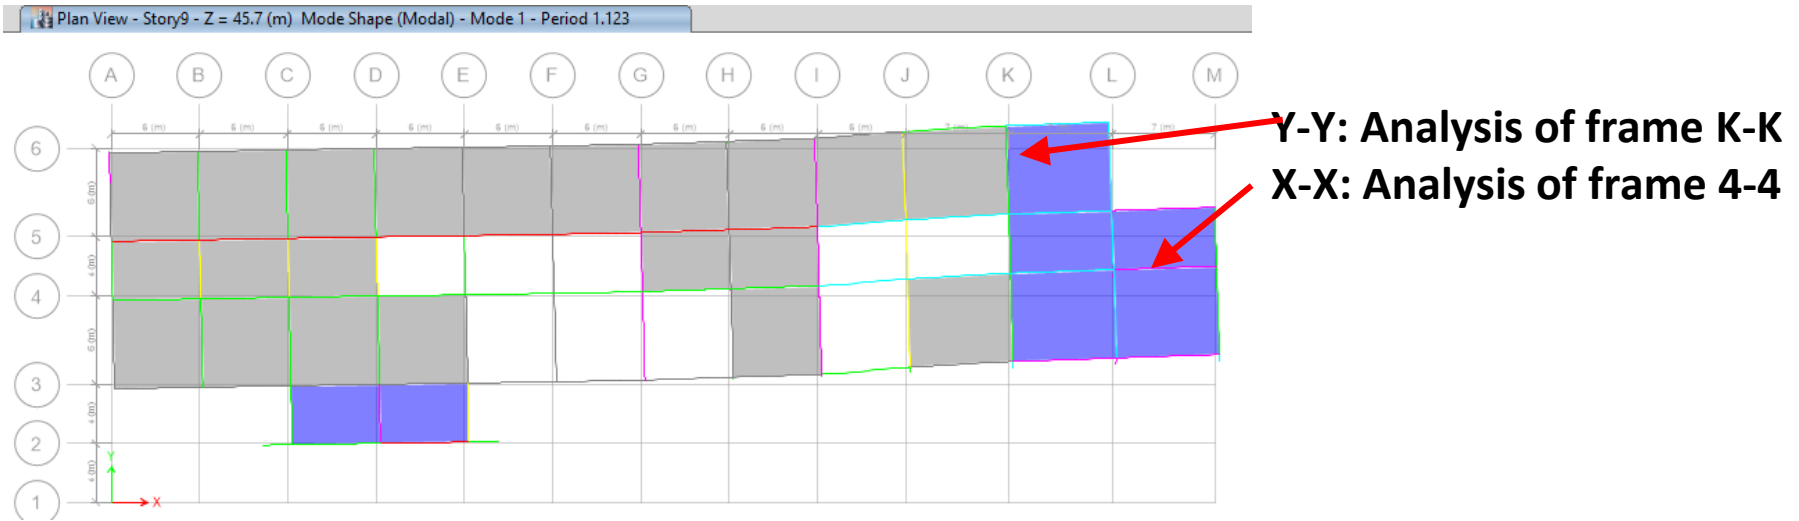


- In the following frames already exist diagonal braces (perspective toggle)

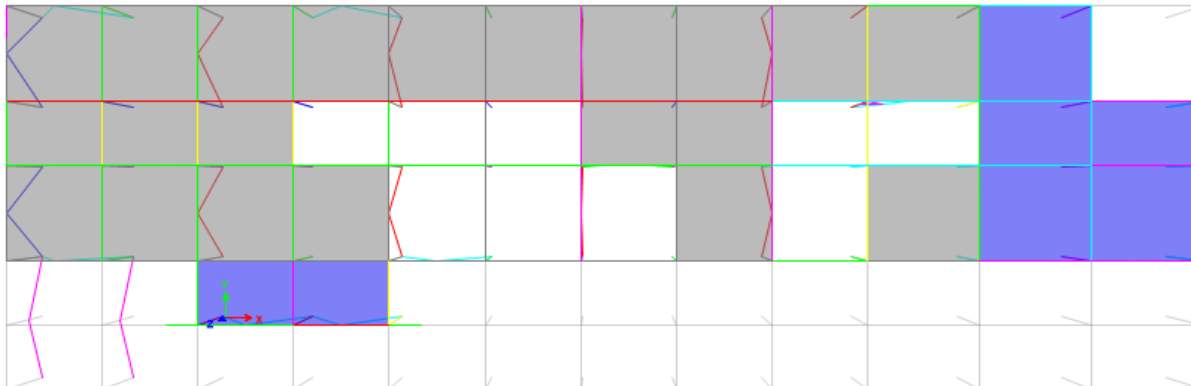


X-X: Case 1

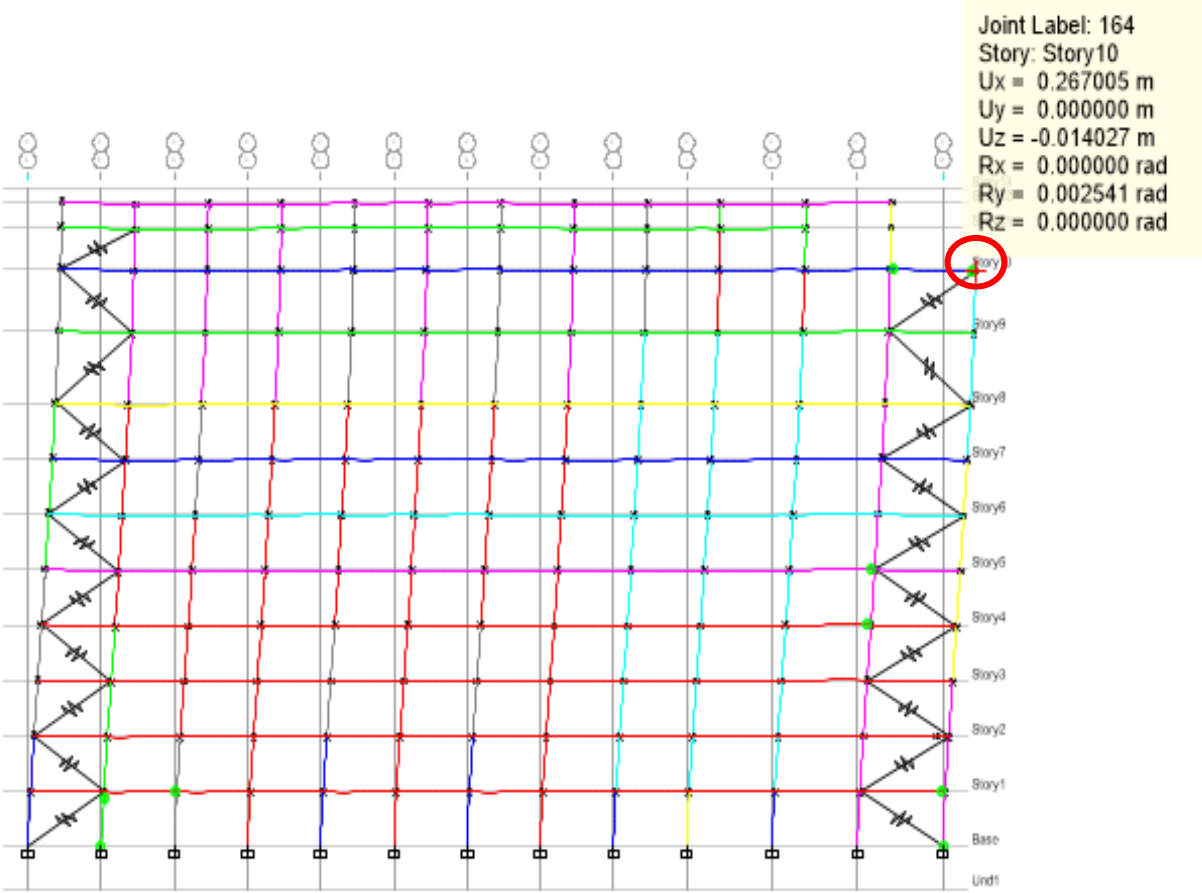


X-X: Case 2

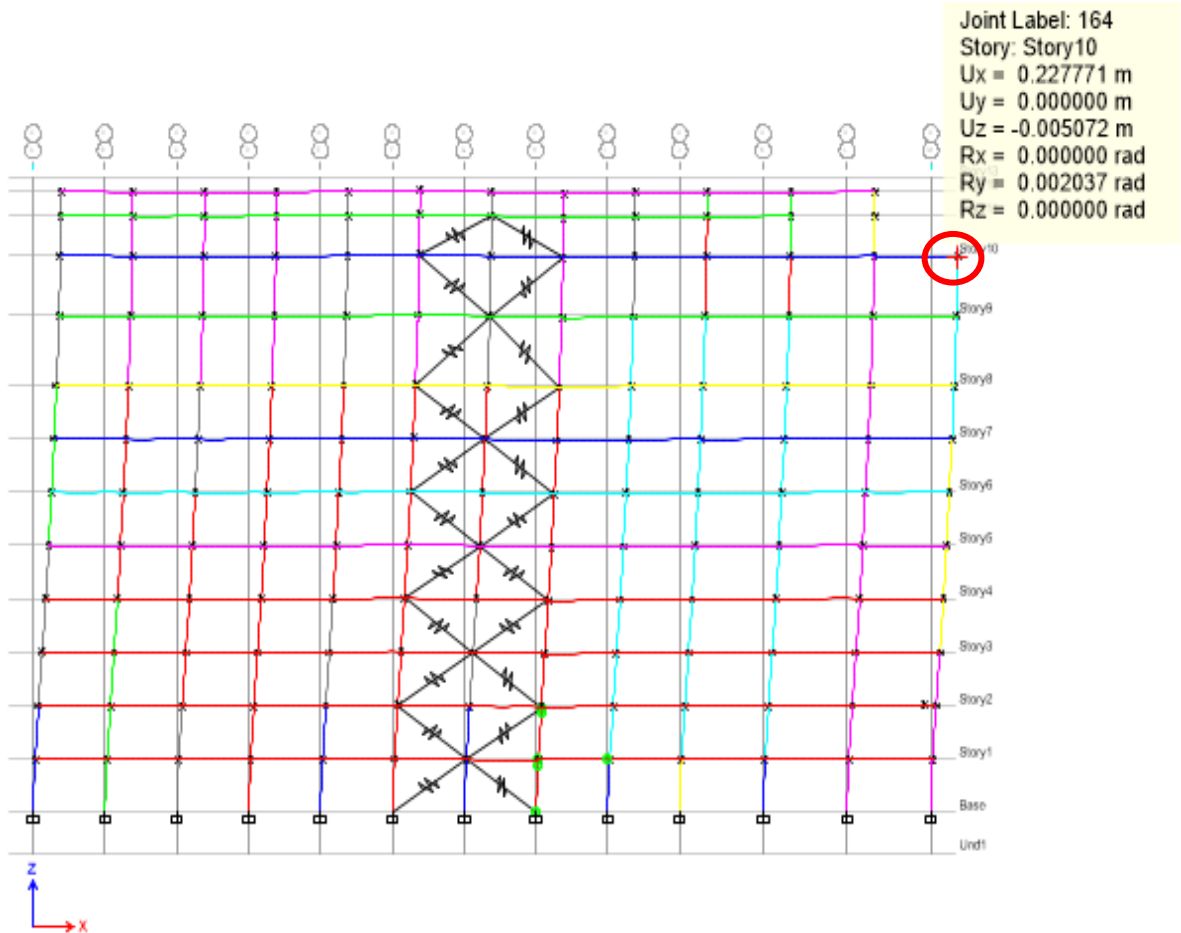

Y-Y: Case 1

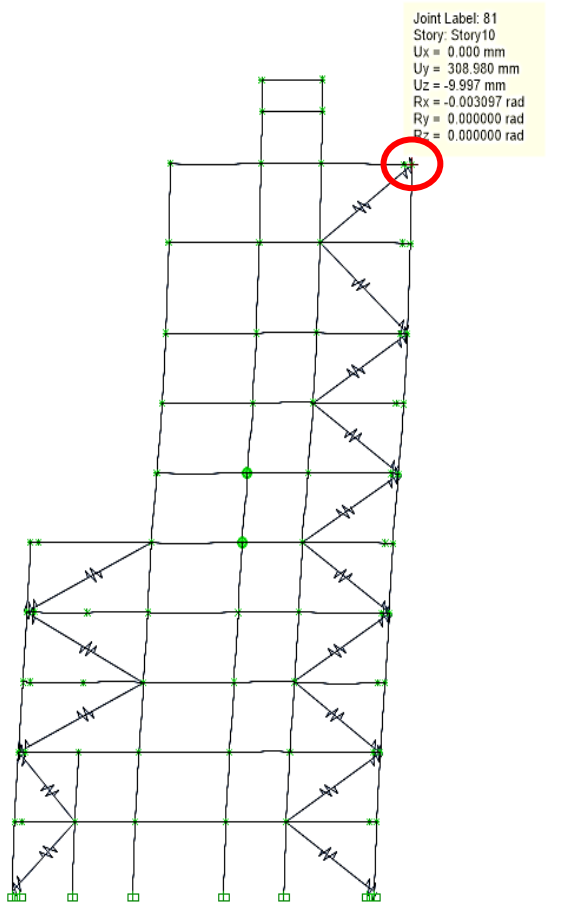


Y-Y: Case 2

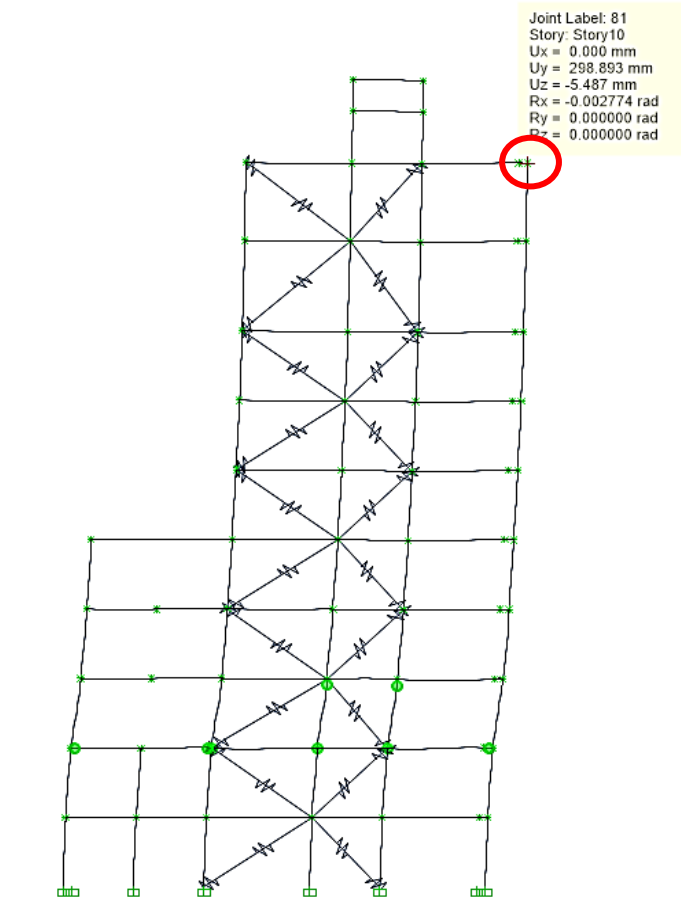

Device




- Steel self-centering device (SSCD) for seismic protection of buildings
- Improve the level of seismic protection of new and pre-existing structures
- Hysteretic device
- Re-centering and recovery of the structure's original dissipative resources

Braconi, Aurelio, Francesco Morelli, and Walter Salvatore. "Development, design and experimental validation of a steel self-centering device (SSCD) for seismic protection of buildings." *Bulletin of Earthquake Engineering* 10.6 (2012): 1915-1941.

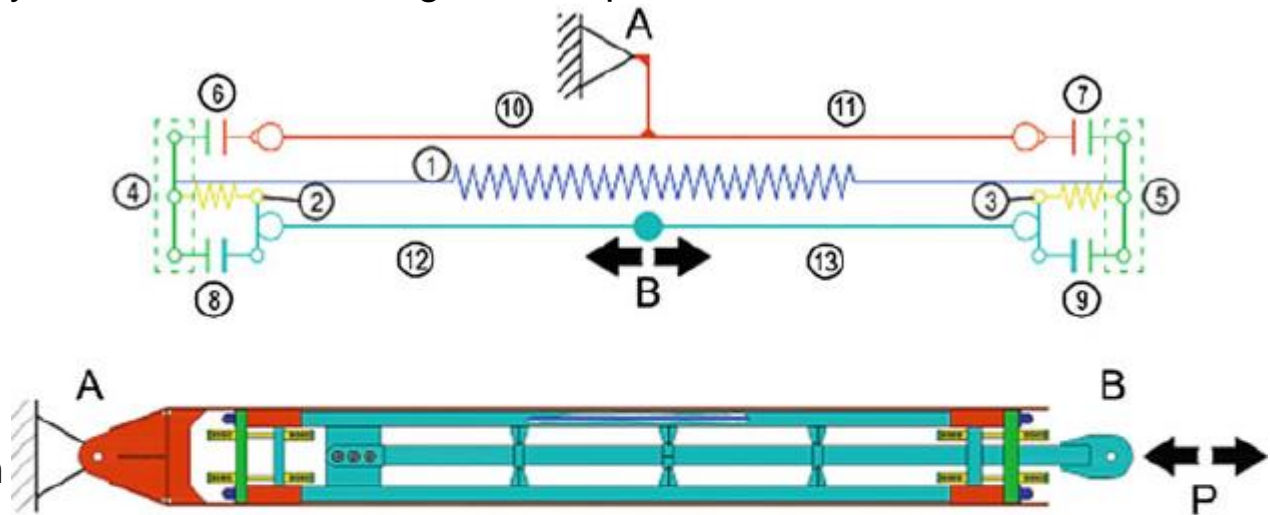

LEGEND	Element ①: Prestressing Elements	Elements ② -③: Dissipative Elements	Elements ④ -⑤: Endplates	Elements ⑥ -⑦: Contact Element External Carter - Endplate:
		Elements ⑧ -⑨: Contact Element Internal Frame - Endplates	Elements ⑩ -⑪: External Carter	Element ⑫ -⑬: Internal Frame

Dampers Modelling

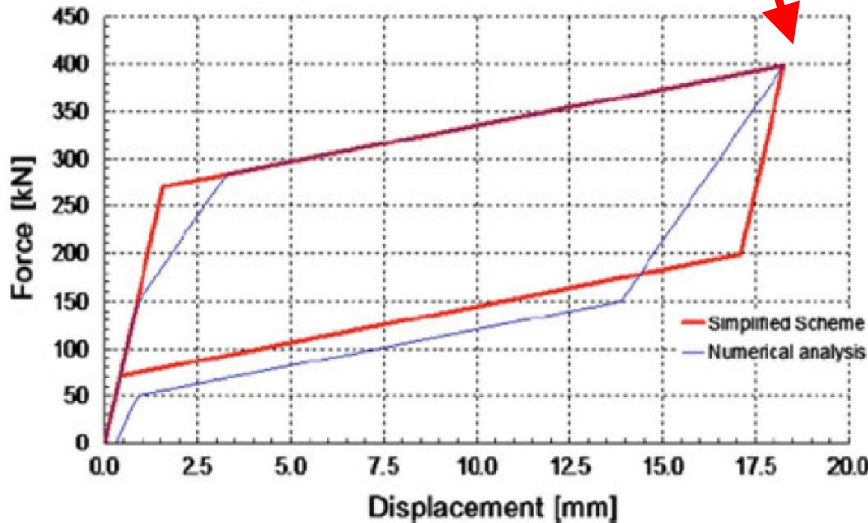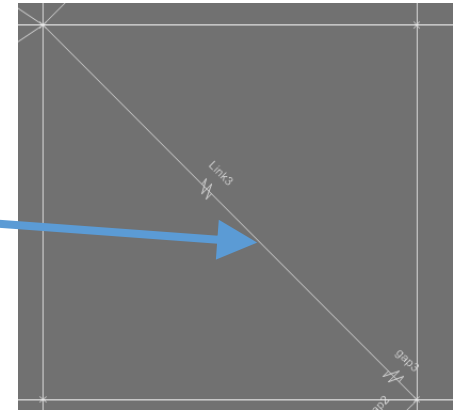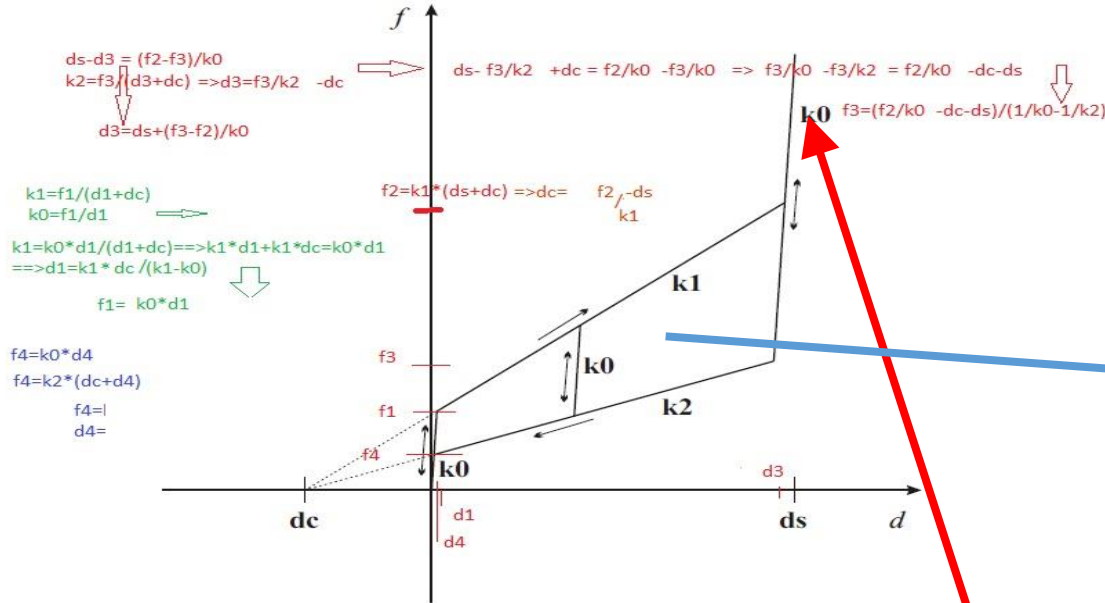


- Friction-Spring Damper
- elastic stiffness k_0
- linear stiffness k_1
- unloading-slipping k_2

Multi-Linear Plastic Property



- Tension limit
- Rigid element / constraint
- Multi-Linear Plastic Property

Multilinear Force-Displ Relation

Pt	Displ (mm)	Force (kN)
1	-100	-10
2	-50	-100
3	-16.8	-442
4	0	0
5	16.8	442

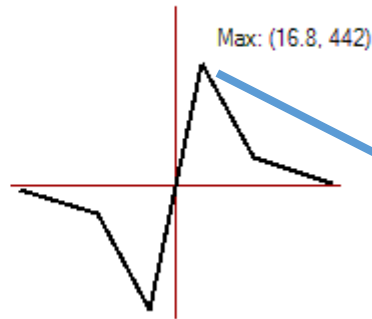


LATERAL VIEW – AFTER THE RETROFITTING

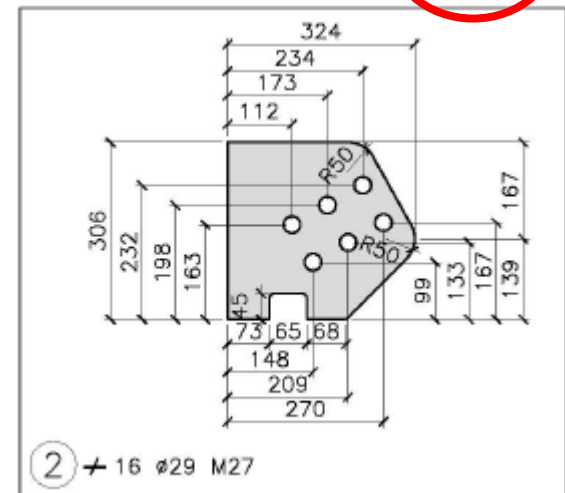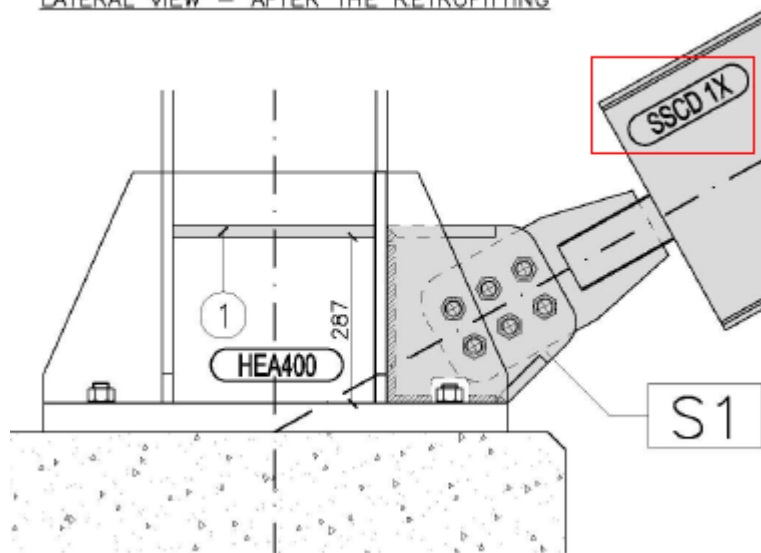

We distinguish **3 cases**:

- **Case 0**: analysis without dampers
- **Case 1**: dampers in spans A-B and L-M, from Und1 to Story 12
- **Case 2**: dampers in spans F-G-H, from Und1 to Story 12

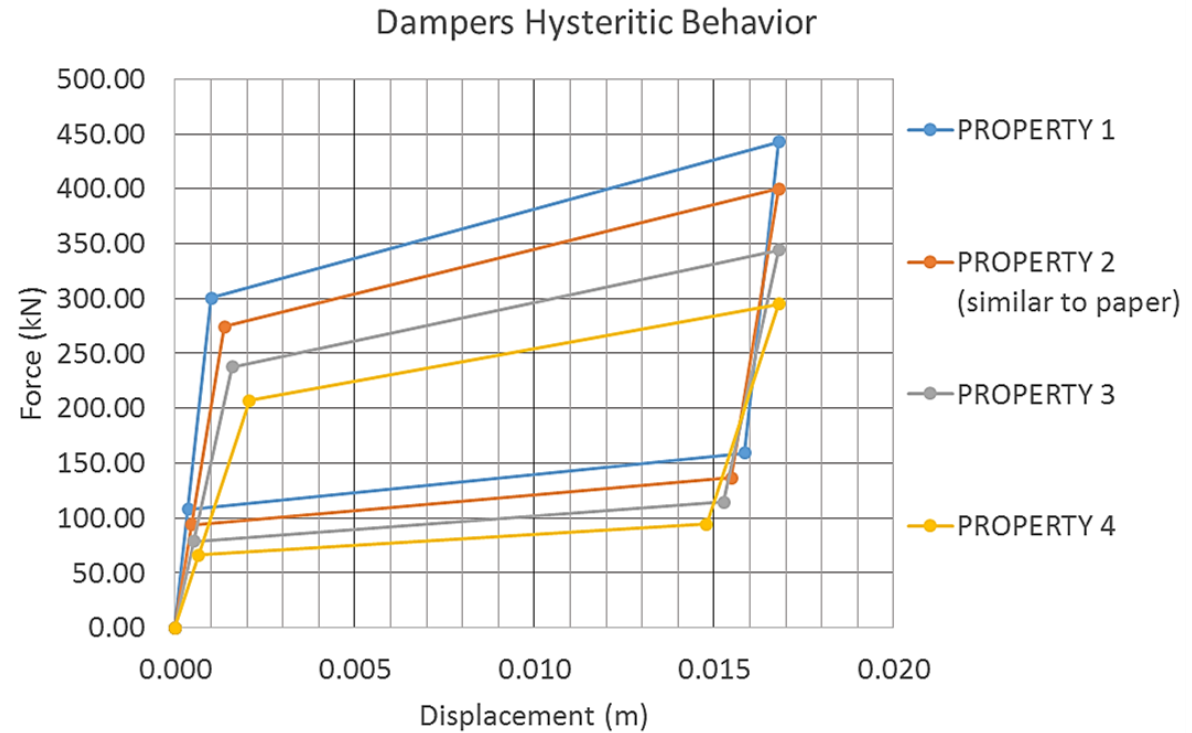


For each case, the property sets (k_0 , k_1 and k_2) of the dampers, for groups of 3 floors


- Property set 1 (from **base to storey 3**),
- Property set 2 (from **storey 3 to storey 6**),
- Property set 3 (from **storey 6 to storey 9**),
- Property set 4 (from **storey 9 to storey 12**),

with Property set 1 >Property set 2>Property set 3>Property set 4.


X-X: Pushover results before and after interventions

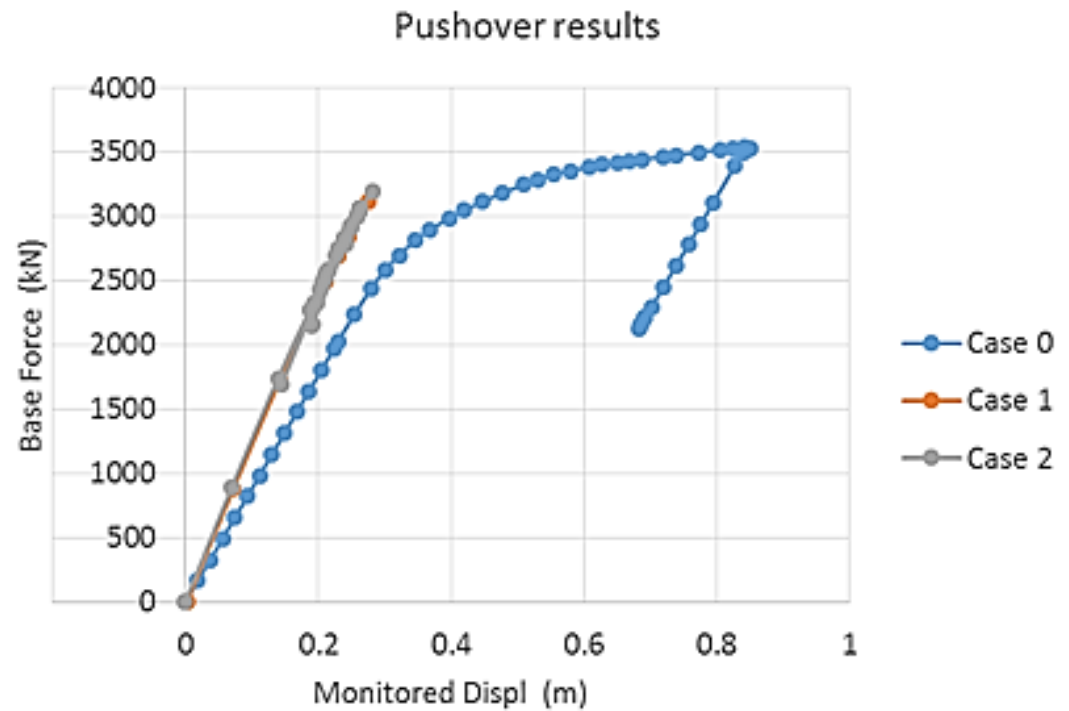


**X-X, Case 0:
Capacity Spectrum**

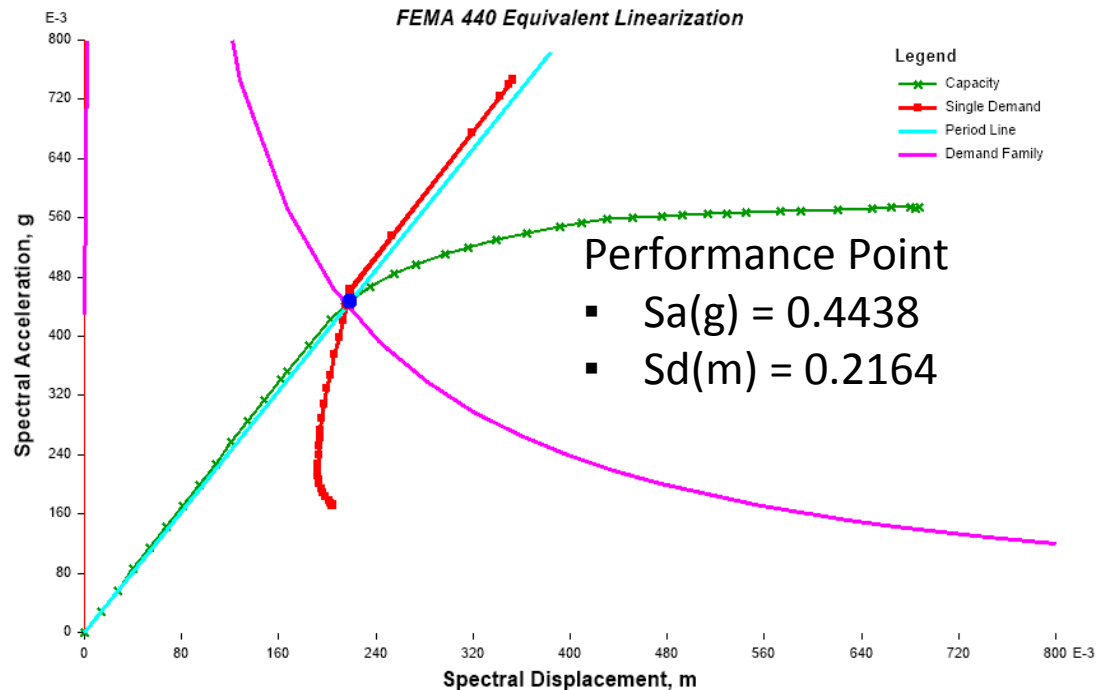

Y-Y: Pushover results before and after interventions

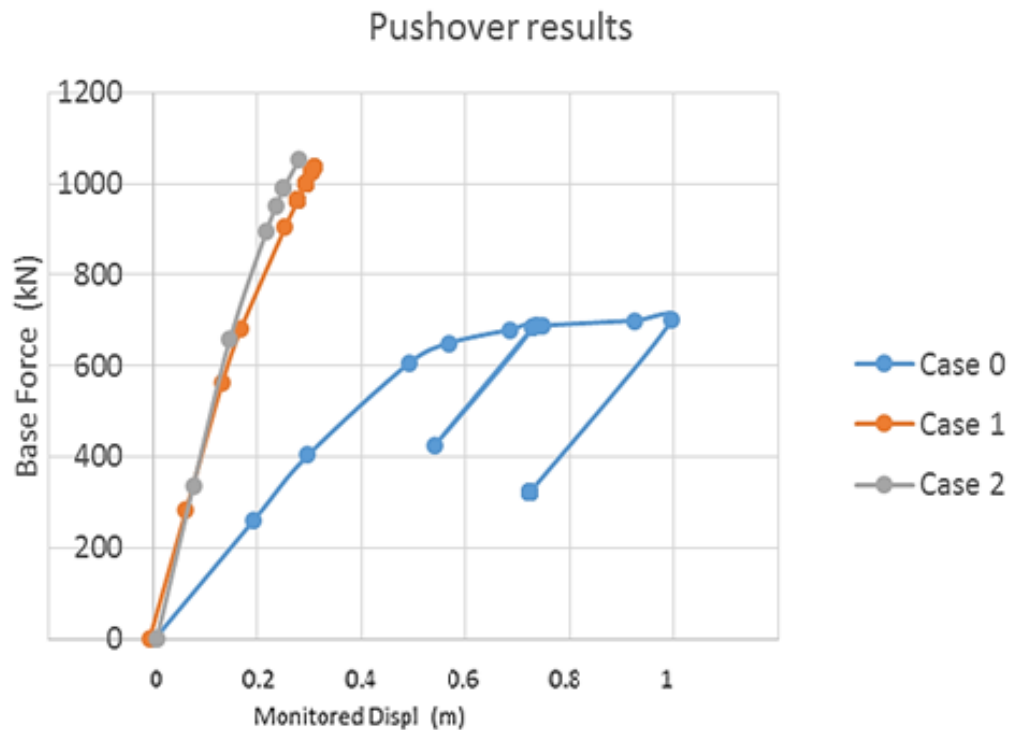


Y-Y, Case 0: Capacity Spectrum

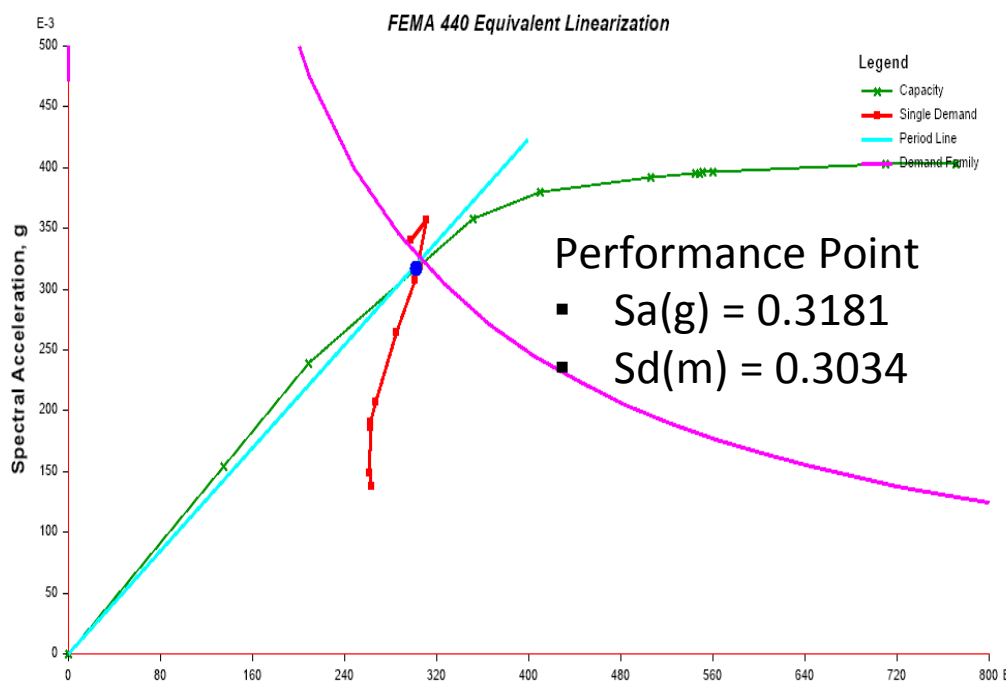


Ground Motions

- Ground Motions (GMs) selected for use in Incremental Dynamic Analyses
- High seismicity (Reggio Calabria, Italy)
- The sets are taken from three different databases available in Rexel (Iervolino et al. 2009)
- Consistent with the requirements of Eurocode 8 (§3.2.3.1)
- Reggio Calabria target spectrum and GMs spectra coherence


REGGIO CALABRIA						
	Vr	P _{vr}	λ	Tr	ag	S.F.
	yrs	%	1/yrs	yrs	g	\
0	100	4%	0.0004	2475	0.512	1.43
1	100	5%	0.0005	1950	0.4687	1.307
2	100	10%	0.0011	949	0.3586	1.000
3	100	22%	0.0025	402	0.2502	0.698
4	100	30%	0.0036	280	0.2122	0.592
5	100	39%	0.0049	202	0.1829	0.510
6	100	50%	0.0069	144	0.1552	0.433
7	100	63%	0.0099	101	0.1292	0.360
8	100	81%	0.0166	60	0.0987	0.275

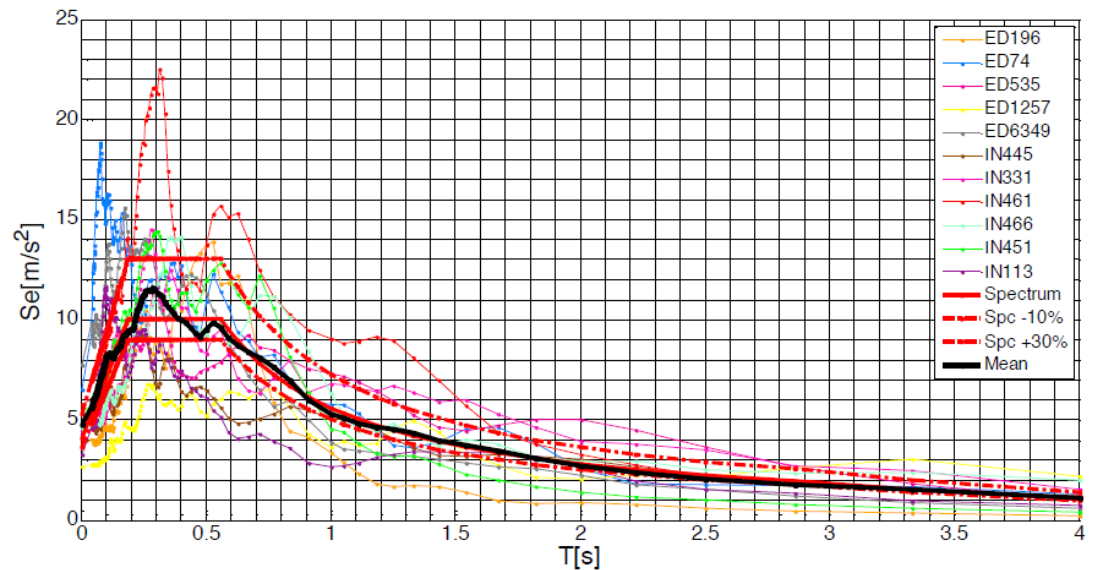


X-X-1: **K14** Damper Hysteresis of ED6349
with scale factor **1.43**

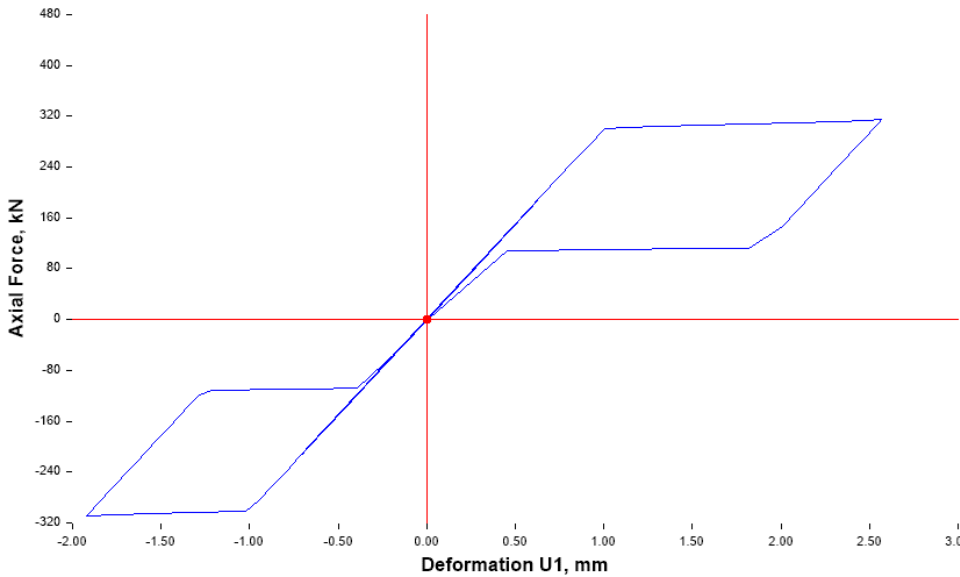


X-X-1: **K14** Damper Hysteresis of ED6349
with scale factor **3.00**

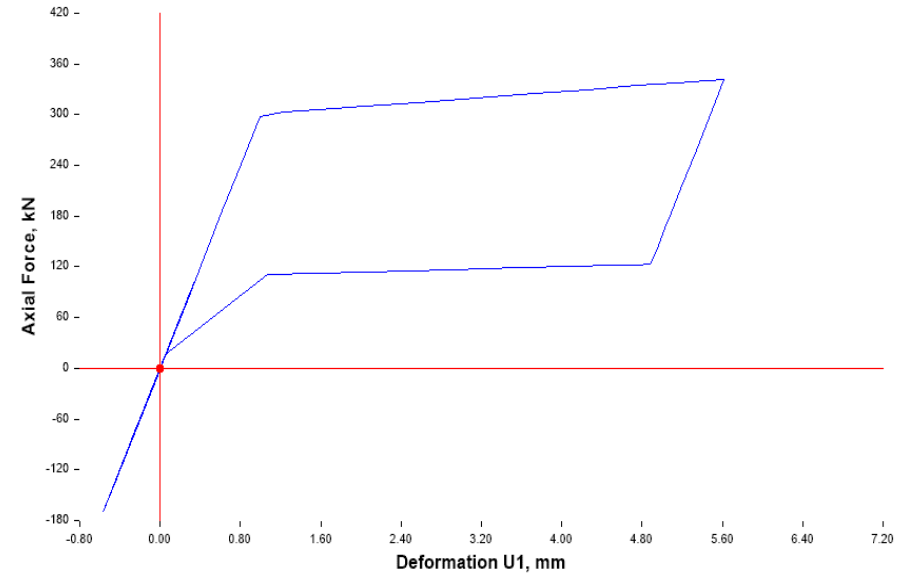

X-X-1: **K13** Damper Hysteresis of ED6349
with scale factor **1.43**

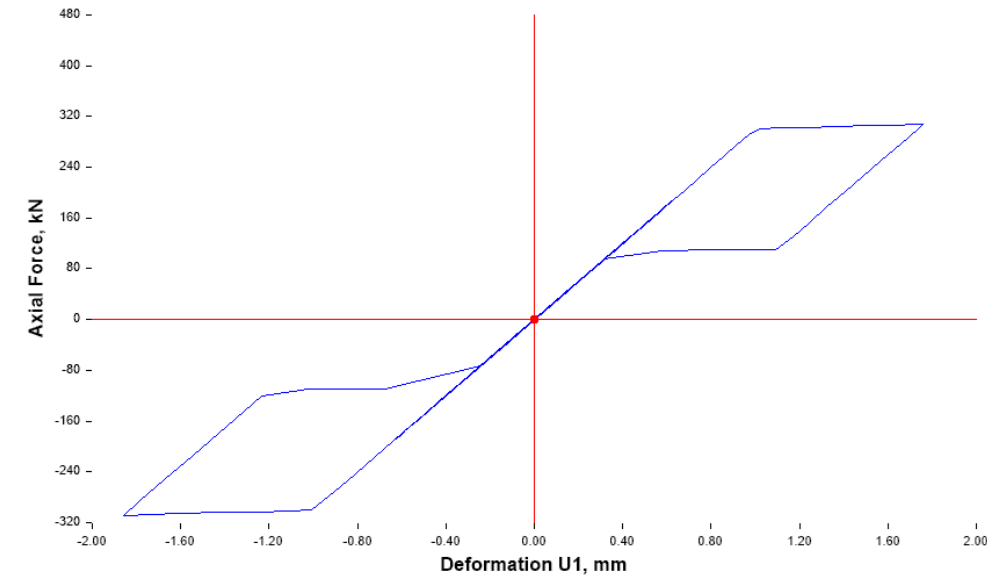


X-X-1: **K13** Damper Hysteresis of ED6349
with scale factor **3.00**

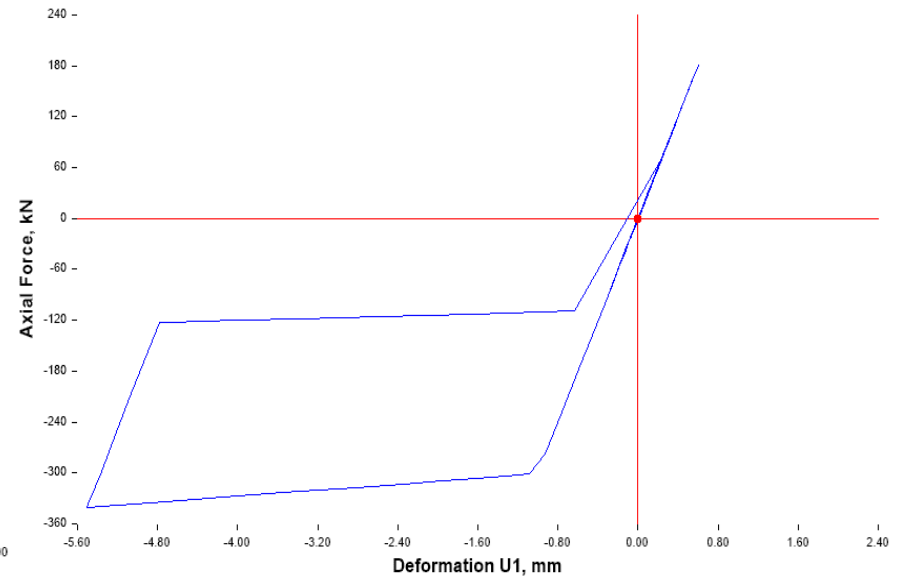


XX IDA curves without dampers (Base Shear – Displacements)


- Newmark
- Wilson
- Hilber-Hughes-Taylor

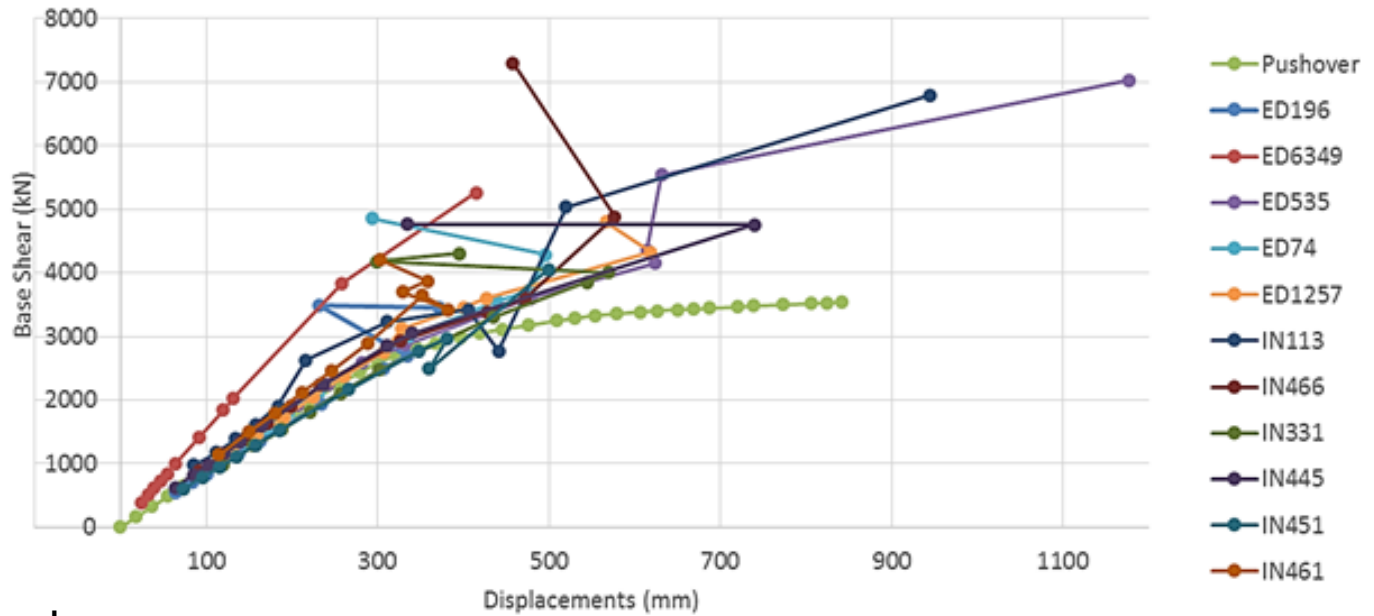


XX IDA curves without dampers (fractiles)

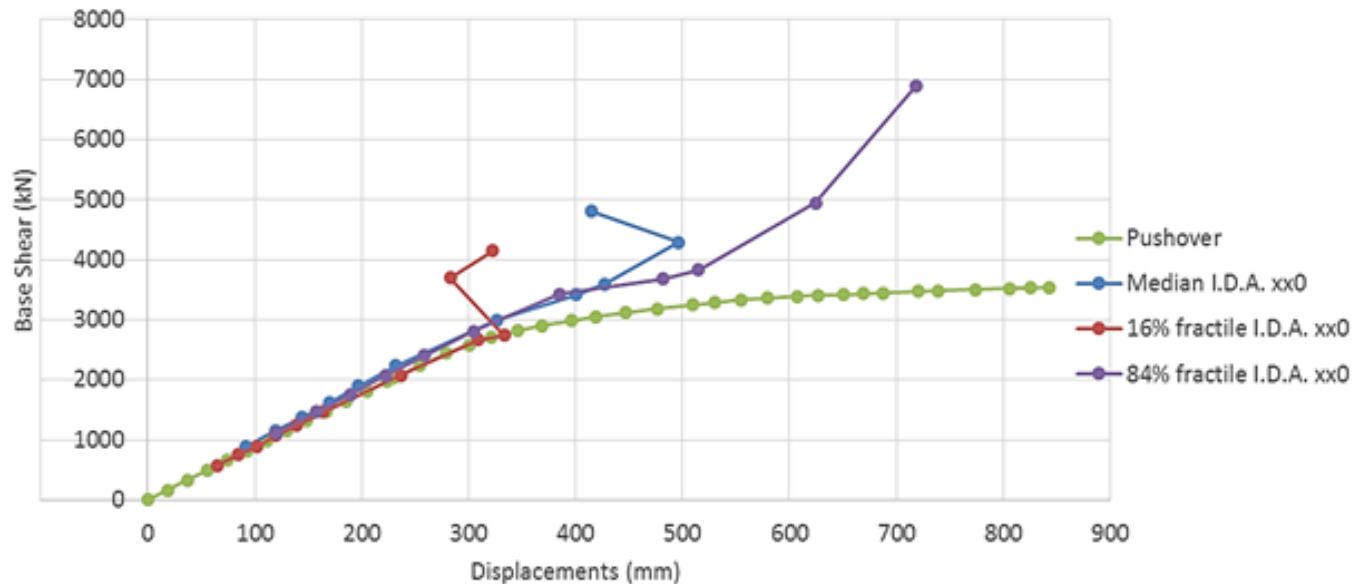


XX IDA curves with dampers (Base Shear – Displacements)

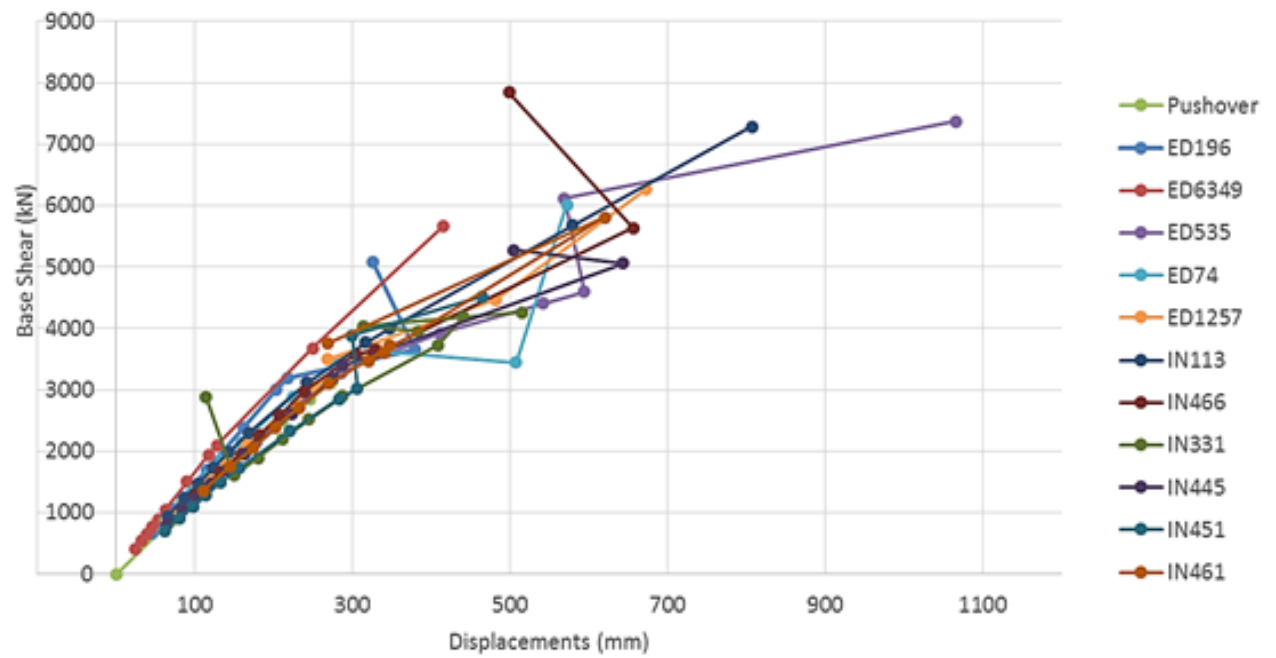


XX IDA curves with dampers (fractiles)

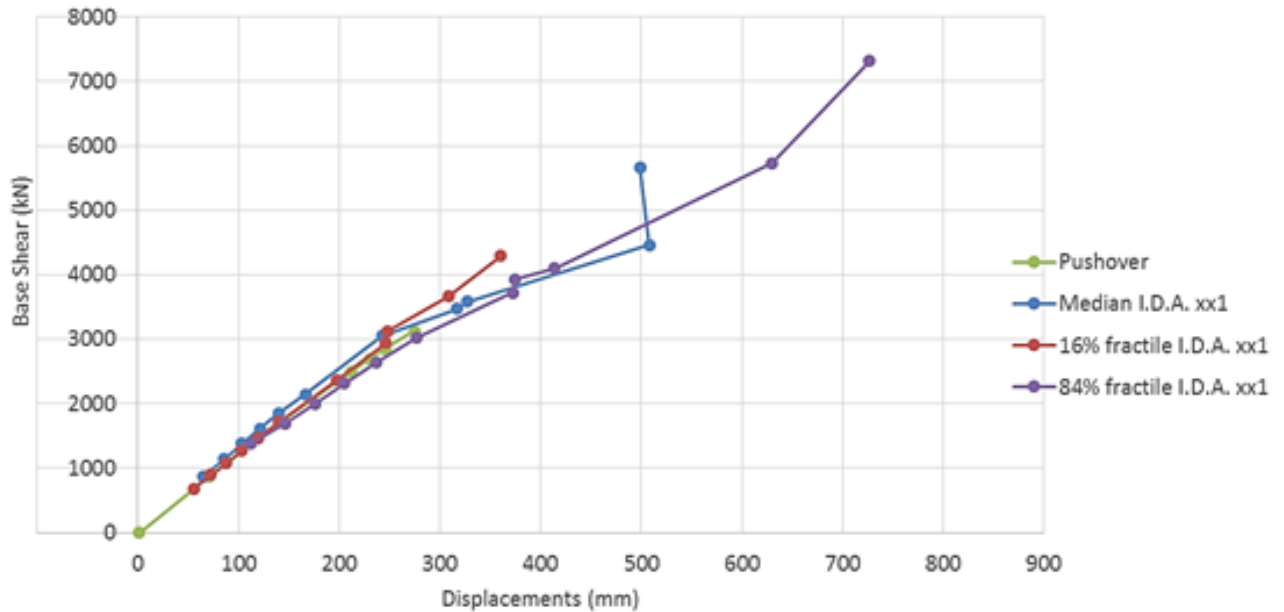


**YY IDA curves
without dampers
(Base Shear –
Displacements)**

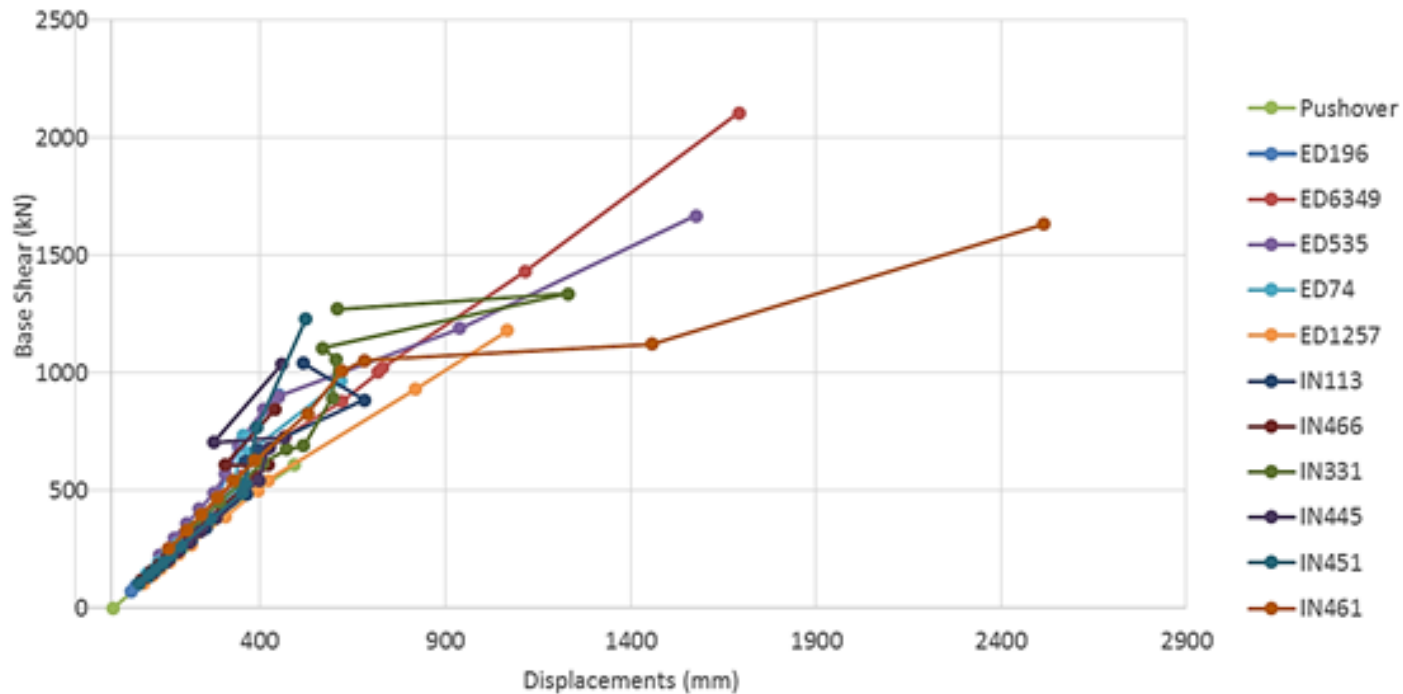


**YY IDA curves
without dampers
(fractiles)**

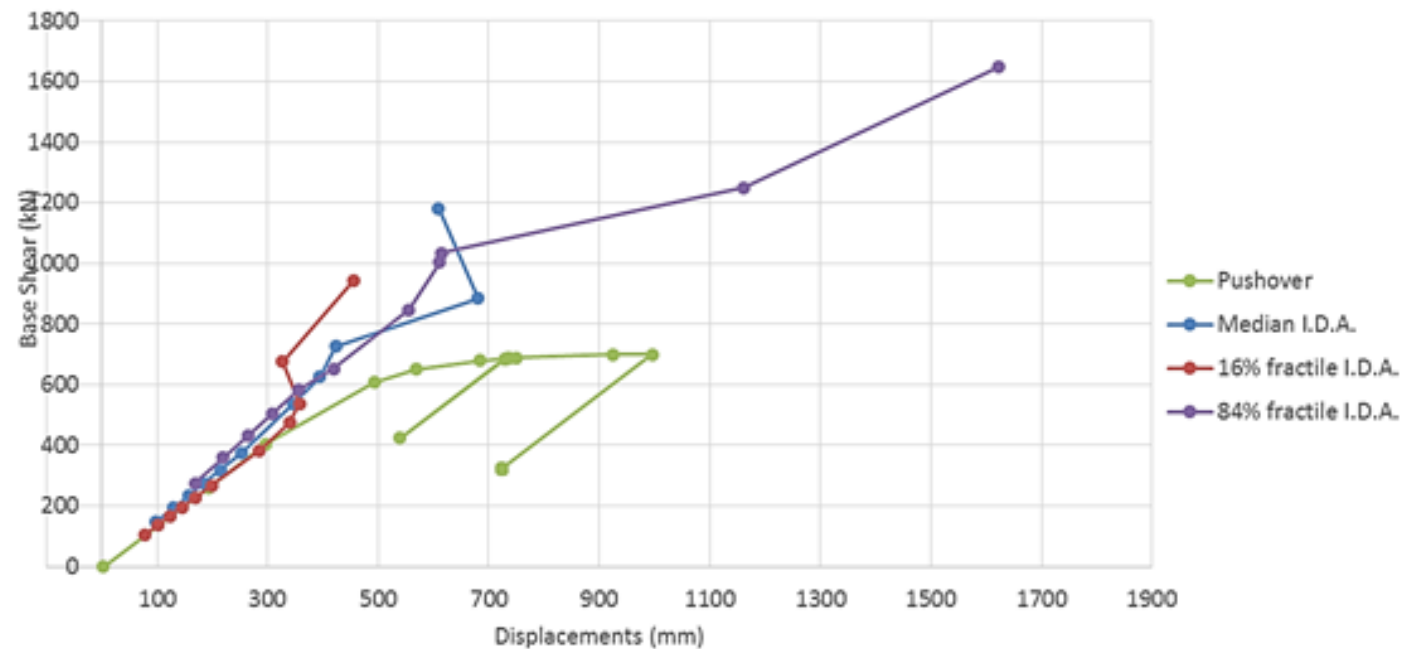

YY IDA curves with dampers (Base Shear – Displacements)

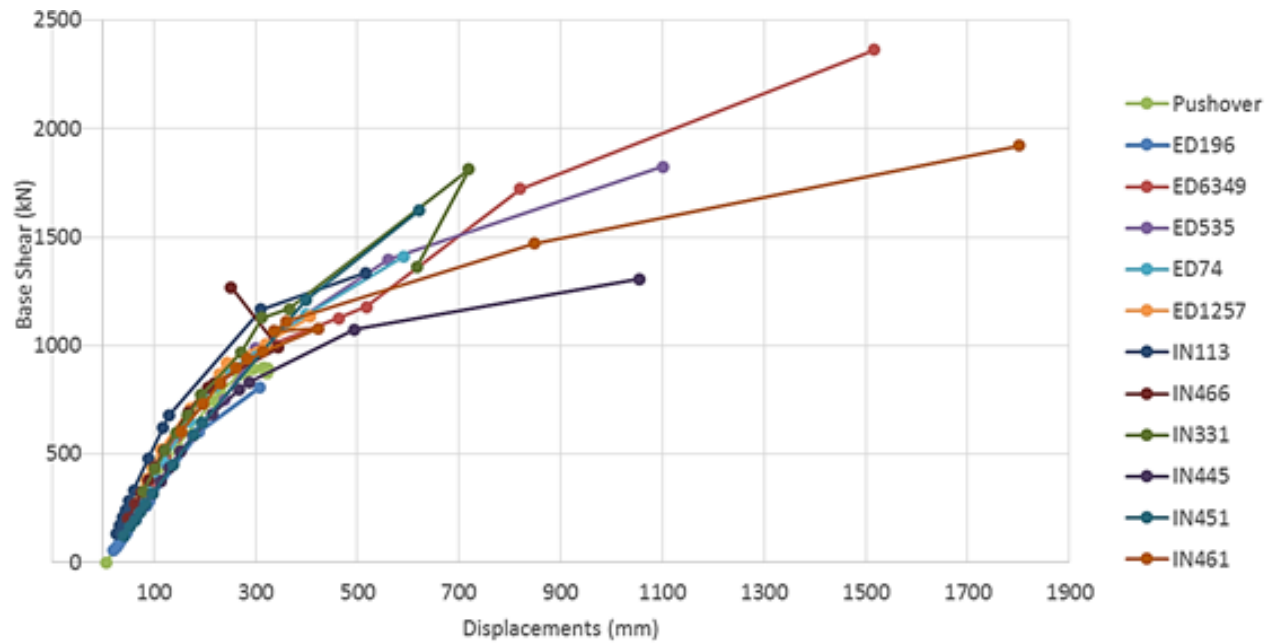

YY IDA curves with dampers (fractiles)

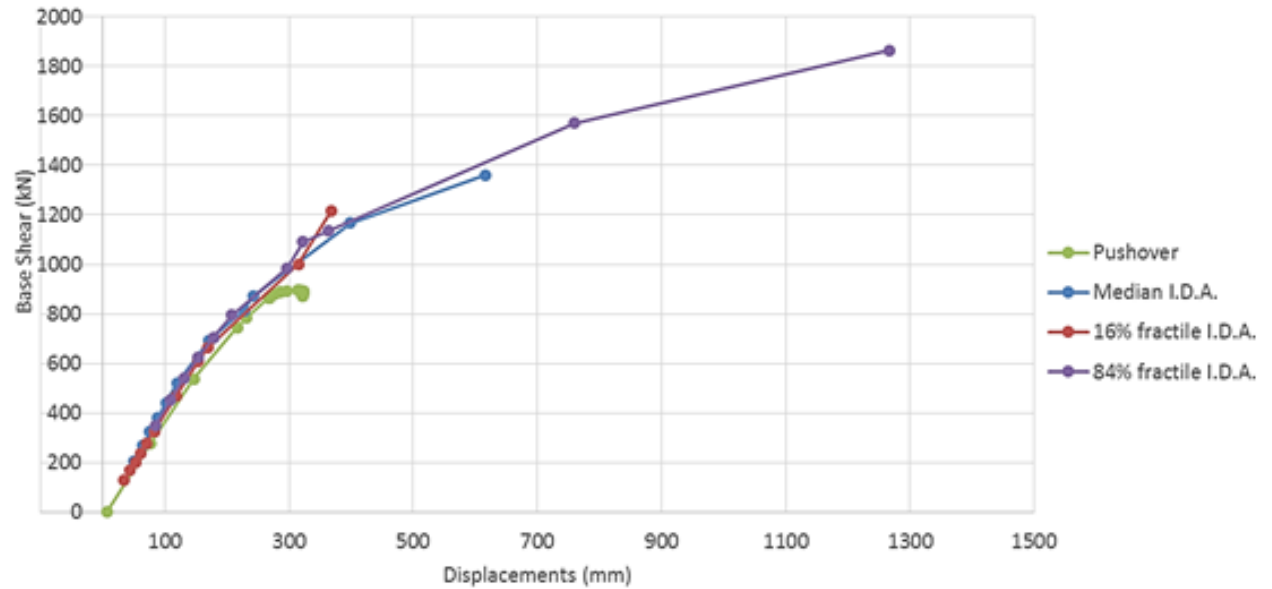

Conclusions

- Modelling of dampers and structure is crucial
- Numerical instabilities & convergence issues
- Early failures of secondary elements
- The results of IDAs are similar to the results of Pushover
- The IDA results were practically the same for the various nonlinear time-history algorithms (Newmark, Wilson, Hilber-Hughes-Taylor)
- Step-size, convergence tolerance and number of iterations
- The dampers increase the stiffness of the frames, and decrease the displacements and interstory drifts of the frames
- The dampers dissipate energy, through the flag-shaped behavior
- IDA capture nonlinear behavior for high accelerations, where pushover stops
- Lower values of dampers stiffness and strength were proposed, in order to achieve the yielding of the damper and the dissipation of energy within the structure.

References

A. Braconi, F. Morelli, W. Salvatore, Development, design and experimental validation of a steel self-centering device (SSCD) for seismic protection of buildings, *Bulletin of Earthquake Engineering*, 10, 1915-1941, 2012.

F. Morelli, A. Piscini, W. Salvatore, Seismic Retrofit of an Industrial Structure through an Innovative Self-Centering Hysteretic Damper: Modelling, Analysis and Optimization, *Proceedings of the VII European Congress on Computational Methods in Applied Sciences and Engineering, ECCOMAS Congress 2016, Crete Island, Greece, 5–10 June 2016*.

M. Faggella, R. Laguardia, R. Gigliotti, F. Morelli, F. Braga, W. Salvatore, Performance-based nonlinear response history analysis framework for the “PROINDUSTRY” project case studies, *Proceedings of the VII European Congress on Computational Methods in Applied Sciences and Engineering, ECCOMAS Congress 2016, Crete Island, Greece, 5–10 June 2016*.

N. Bakas, J. Bellos, A. Kanyilmaz, S. Makridakis: Regression analysis vs genetic algorithms: computational efficiency assessment on the design of proindustry project SSCD isolators under Incremental dynamic loading. *VII European Congress on Computational Methods in Applied Sciences and Engineering; 06/2016*

N.D. Lagaros, N. Bakas, M. Papadrakakis: Optimum Design Approaches for Improving the Seismic Performance of 3D RC Buildings. Journal of Earthquake Engineering 03/2009; 13(3-3):345-363., DOI:10.1080/13632460802598594

N. Bakas, S. Makridakis, M. Papadrakakis: Torsional parameters importance in the structural response of multiscale asymmetric-plan buildings. 10/2016; 1(4):285-304., DOI:10.12989/mmm.2016.1.4.285

J. Bellos, D.J. Inman, N. Bakas: Nature of Coupling in Non-conservative Distributed Parameter Systems Attached to External Damping Sources, Mathematics and Mechanics of Solids, 06/2017, DOI:10.1177/1081286517714022.

A. Konstantinides, J. Bellos: Earthquake Resistant Buildings made of Reinforced Concrete: Static and Dynamic Analysis according to Eurocodes. Volume B, Athens, Alta Grafico SA., 2013, ISBN: 978-960-85506-4-3.